



UV

: WP-UVx-G3/4-3y

:

-
- 0-5V 4-20mA
-

: UV

UV

:



(mm)

(g)

8

165

316L



T_{opt} -30-85 °C

T_{sto} -40-90 °C

p 10 bar

(25 °C)

V_{cc} 9-24 V


I_{oo}



UV

: WP-UVx-G3/4-3y

(unit: mm)

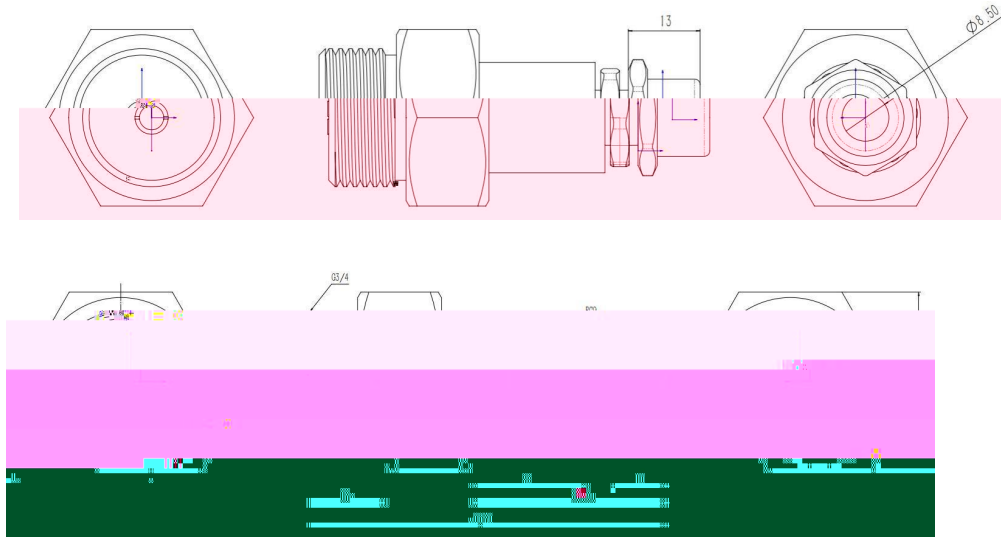

connector view
5 pin M 12×1
RSFM5

5-pin analog plug:
pin 1= V_{CC} , pin 2=null,
pin 3= I_{out} / V_{out} , pin 4=GND / null,
pin 5=null

5 : 1= V_{CC} , 2= , 3= , 4= / , 5=

UV ()

-
-
-
-
-
-

100%
24 V



UV ()

-
-
-
-
-
-

5

RS-485

9-24 V

