

UV

: WP-UVx-G3/4-4y

:

-
-
-
-

0-5V 4-20mA

:

:



(mm)

(g)

11

160

316L



T_{opt}	-30-85	°C
T_{sto}	-40-90	°C
p	10	bar
V_{cc}	9-24	V
I	4-20	

(25 °C)






UV

: WP-UVx-G3/4-4y

(unit: mm)

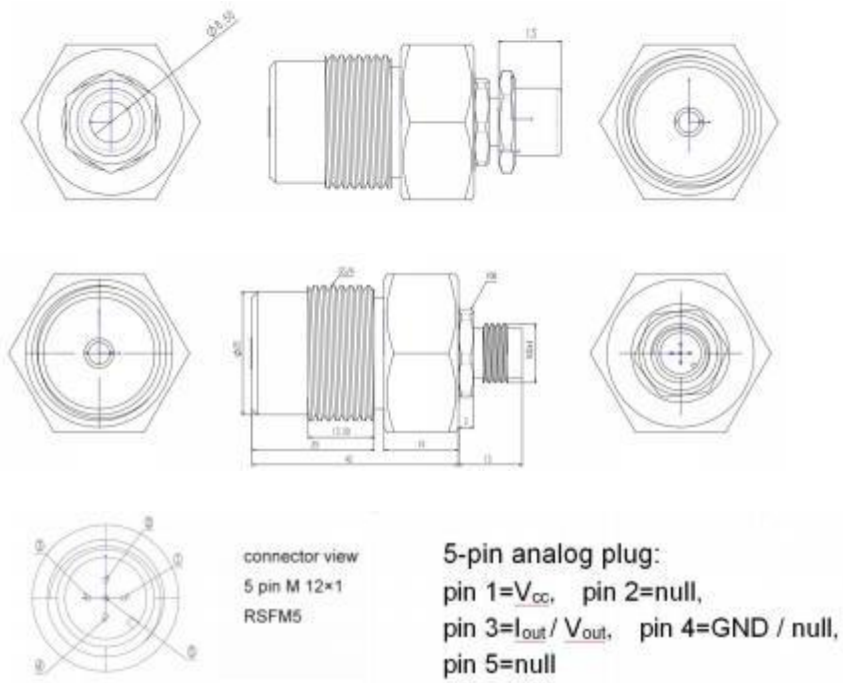


5 : 1=V_{cc}, 2= , 3= , 4= / , 5=

UV ()

-
-
-
-
-
-

100%
24 V

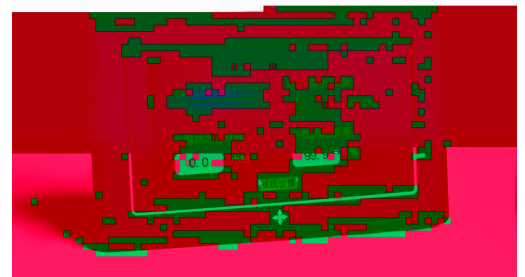

UV ()

-
-
-
-
-
-

5

RS-485

9-24 V

